

Shower Rods Technical Specification


Shower Rod Sets – Exposed Screw

58

Stock Numbers:

- **58-5 – 5' Stainless Steel Shower Rod Set**
Polished Finish
1" Diameter Smooth Rod
Exposed Screw Mounting
Flanges (58-F)

Dimensions:

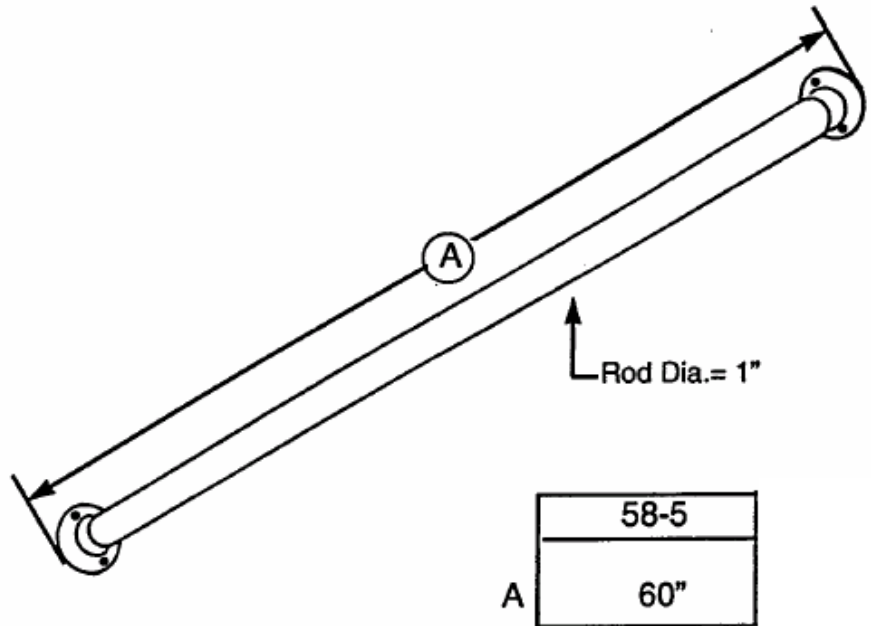

(For flange dimensions, see 58-F Technical Specification)

Materials:

Showers Rods are 20-gauge stainless steel with a polished finish.

See Technical Specification for 58-F for information on the adjustable flanges.

Installation Instructions:

1. Place flanges on both ends of shower rod.
2. Position rod assembly in desired location.
3. Mark location of mounting holes for both flanges.
4. Drill starter holes.
5. Attach left bracket to wall using 2" screws (provided).
6. Insert rod and right bracket assembly into left bracket.
7. Slide right bracket against wall and attach with 2" screws (provided).

Note: Wood blocking is preferable behind all wall surfaces. If wood blocking is not available, the following optional fasteners are suggested: Tile/Masonry – Plastic or Lead Anchors; Plaster/Drywall – Toggle Bolts

Stock Number: _____ **Shower Rod**
By Creative Specialties



25300 AL MOEN DRIVE • NORTH OLMSTED, OH 44070
CORPORATE HEADQUARTERS: (800) 321-8809 • FAX: (800) 848-6636
INTERNATIONAL: (440) 962-2000 • FAX: (440) 962-2726
CUSTOMER SERVICE (USA): 800-882-0116 • FAX: (888) 379-2720
WWW.MOEN.COM

©Copyright Creative Specialties International

Literature #BA1629